




SEY SU
HIDRAULICA.SL

CILINDROS DE DOBLE EFECTO TERCER PUNTO CON ROTULAS

CONNECTION THIRD HYDRAULIC POINT WITHOUT DOUBLE PILOT OPERATED VALVE

VÉRIN DOUBLE EFFET

Special: VERIN 3° POINT DOUBLE EFFET

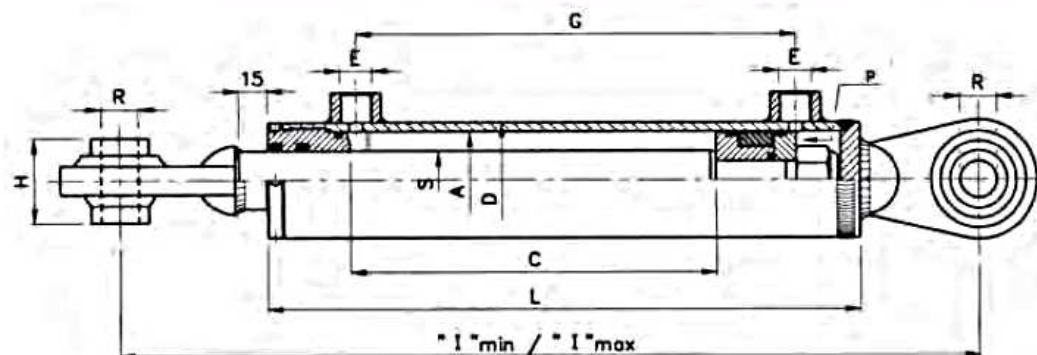

Referencia Part No. Référence	ØS	ØA	C	L	LONGITUD LENGHT LONGUEUR l/min - l/max	Kg.	ØD	E	G	H	ØR	P Kg 100 Bar	€ sin válvula € without valve € sans valve
DECC3050160CR19	30	50	160	177	416/576	5,6	60	3/8 gas	198	44	19,3	1.960	155,21
DECC3050210CR19			210	327	466/676	6,2			248				179,85
DECC3050280CR19			280	397	536/816	7,1			318				173,11
DECC3050400CR19			400	517	656/1056	8,5			438				183,22
DECC3050160CR25			160	277	426/586	6,3			198	51	25,3		167,49
DECC3050210CR25			210	327	476/686	6,9			248				146,97
DECC3050280CR25			280	397	546/826	7,9			318				155,40
DECC3050400CR25			400	517	666/1066	9,2			438				166,46
DECC3565160CR25	35	65	160	286	440/600	8,4	75	3/8 gas	199	51	25,3	3.310	191,09
DECC3565210CR25			210	335	490/700	9,3			249				207,95
DECC3565280CR25			280	408	560/840	10,4			319				214,70
DECC3565400CR25			400	526	680/1080	12,3			439				240,55
DECC4080160CR25	40	80	160	312	461/621	12,5	92	3/8 gas	210	51	25,3	5.020	231,56
DECC4080210CR25			210	362	511/721	13,7			260				231,58
DECC4080280CR25			280	432	581/861	15,2			330				245,14
DECC4080400CR25			400	552	701/1101	18			450				267,23
Convertor de 25 a 19 / Change de Ø 25 a Ø 19													-