




SEY SU
HIDRAULICA.SL

CILINDROS DE DOBLE EFECTO TERCER PUNTO CON ROTULAS

CONNECTION THIRD HYDRAULIC POINT WITHOUT DOUBLE PILOT OPERATED VALVE

VÉRIN DOUBLE EFFET

Special: VERIN 3° POINT DOUBLE EFFET

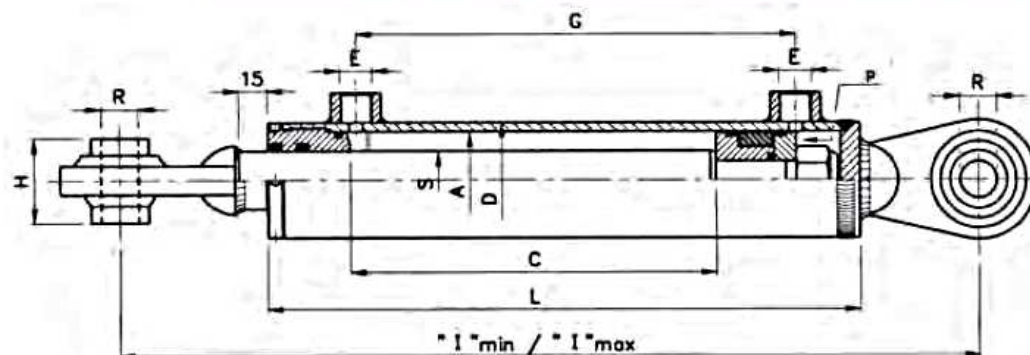

| Referencia Part No. Référence | ØS | ØA | C | L | LONGITUD LENGHT LONGUEUR l/min - l/max | Kg. | ØD | E | G | H | ØR | P Kg 100 Bar | € sin válvula € without valve € sans valve |
|--|----|----|-----|-----|---|------|----|------------|-----|----|------|--------------------|--|
| DECC3050160CR19 | 30 | 50 | 160 | 177 | 416/576 | 5,6 | 60 | 3/8 gas | 198 | 44 | 19,3 | 1.960 | 155,21 |
| DECC3050210CR19 | | | 210 | 327 | 466/676 | 6,2 | | | 248 | | | | 179,85 |
| DECC3050280CR19 | | | 280 | 397 | 536/816 | 7,1 | | | 318 | | | | 173,11 |
| DECC3050400CR19 | | | 400 | 517 | 656/1056 | 8,5 | | | 438 | | | | 183,22 |
| DECC3050160CR25 | | | 160 | 277 | 426/586 | 6,3 | | | 198 | 51 | 25,3 | | 167,49 |
| DECC3050210CR25 | | | 210 | 327 | 476/686 | 6,9 | | | 248 | | | | 146,97 |
| DECC3050280CR25 | | | 280 | 397 | 546/826 | 7,9 | | | 318 | | | | 155,40 |
| DECC3050400CR25 | | | 400 | 517 | 666/1066 | 9,2 | | | 438 | | | | 166,46 |
| DECC3565160CR25 | 35 | 65 | 160 | 286 | 440/600 | 8,4 | 75 | 3/8 gas | 199 | 51 | 25,3 | 3.310 | 191,09 |
| DECC3565210CR25 | | | 210 | 335 | 490/700 | 9,3 | | | 249 | | | | 207,95 |
| DECC3565280CR25 | | | 280 | 408 | 560/840 | 10,4 | | | 319 | | | | 214,70 |
| DECC3565400CR25 | | | 400 | 526 | 680/1080 | 12,3 | | | 439 | | | | 240,55 |
| DECC4080160CR25 | 40 | 80 | 160 | 312 | 461/621 | 12,5 | 92 | 3/8 gas | 210 | 51 | 25,3 | 5.020 | 231,56 |
| DECC4080210CR25 | | | 210 | 362 | 511/721 | 13,7 | | | 260 | | | | 231,58 |
| DECC4080280CR25 | | | 280 | 432 | 581/861 | 15,2 | | | 330 | | | | 245,14 |
| DECC4080400CR25 | | | 400 | 552 | 701/1101 | 18 | | | 450 | | | | 267,23 |
| Convertor de 25 a 19 / Change de Ø 25 a Ø 19 | | | | | | | | | | | | | - |