


# CILINDROS DE DOBLE EFECTO

## DOUBLE ACTING CYLINDER - TYPE F

### VÉRIN DOUBLE EFFET



**SEY SU**  
HIDRÁULICA S.L.

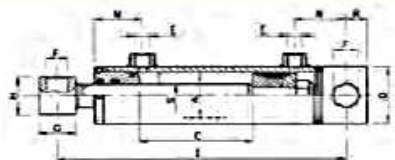

**Presión máxima de trabajo: 210 bar / Max. Working Pressure: 210 bar / Pression max. travail: 210 bar**

Referencia Part No. Référence	ØS	ØA	C	I	Kg.	ØD	E	ØF	ØG	H	M	N	R	Kg./100Bar	€
DECC2032050	20	32	50	205	2	40	1/4 gas	16,4	28	35	43	38	17	800	89,33
DECC2032100			100	255	2,5										92,36
DECC2032150			150	305	3										95,40
DECC2032200			200	355	3										98,44
DECC2032250			250	405	3,5										101,47
DECC2032300			300	455	3,5										104,51
DECC2540100	25	40	100	270	3,5	50	3/8 gas	20,5	35	40	43	45	19	1.250	103,20
DECC2540150			150	320	4										109,43
DECC2540200			200	370	4,5										110,32
DECC2540250			250	420	5										113,88
DECC2540300			300	470	5,5										119,38
DECC2540400			400	570	6,5										127,18
DECC2540500	500	670	7,5	137,55											
DECC3050100	30	50	100	300	5,5	60	3/8 gas	25,5	45	45	46	58	25	1.960	120,11
DECC3050150			150	350	6										124,25
DECC3050200			200	400	6,5										128,39
DECC3050250			250	450	7,5										132,52
DECC3050300			300	500	8										136,61
DECC3050400			400	600	9										148,44
DECC3050500			500	700	10,5										158,39
DECC3050600			600	800	11,5										168,34
DECC3050700			700	900	13										178,02
DECC3050800			800	1000	14										189,54
DECC3050900					202,11										
DECC3060100	30	60	100	300	6,5	70	3/8 gas	25,5	45	45	51	58	25	2.820	128,33
DECC3060150			150	350	7,5										133,99
DECC3060200			200	400	8										139,64
DECC3060250			250	450	8,5										145,30
DECC3060300			300	500	9,5										150,95
DECC3060350			350	550	10										156,61
DECC3060400			400	600	11										162,26
DECC3060450			450	650	11,5										167,91
DECC3060500			500	700	12										173,57
DECC3060600			600	800	13,5										189,22
DECC3060700	700	900	15	204,87											
DECC4070200	40	70	200	410	11	80	3/8 gas	30,5	54	55	51	58	25	3.840	175,41
DECC4070250			250	460	11,5										181,69
DECC4070300			300	510	12,5										188,23
DECC4070350			350	560	13,5										194,78
DECC4070400			400	610	14,5										209,96
DECC4070450			450	660	15,5										214,68
DECC4070500			500	710	16,5										216,51
DECC4070600			600	810	18,5										229,38
DECC4070700			700	910	20,5										255,66
DECC4080200	40	80	200	410	14,5	92	3/8 gas	30,5	54	55	62	58	25	5.020	225,93
DECC4080250			250	460	15,5										266,40
DECC4080300			300	510	17										216,40
DECC4080350			350	560	18										251,85
DECC4080400			400	610	19										238,16
DECC4080500			500	710	21,5										271,49
DECC4080600			600	810	23,5										269,18
DECC4080700			700	910	26										299,76
DECC50100300	50	100	300	545	29	115	3/8 gas	30,5	54	70	81	60	34	7.850	362,07
DECC50100400			400	645	32,5										388,51
DECC50100500			500	745	36										415,22
DECC50100700			700	945	43										522,76
DECC50100900			900	1145	50										592,87
DECC70120500	70	120*	500	770	62	140	1/2 gas	40,5	70	80	81	65	40	11.300	926,23
DECC701201000			1000	1270	93,5										1.337,46

\* Acabado en H8 / Finished in H8 / Tige chromée en H8